

Vacuum Packaging System Spec Sheet

GREENVAC VACUUM PACKAGING SYSTEM

ITEM: GV150-GN1/3



DESCRIPTION

The robust, stainless steel 150-1/3 GN vacuum packaging system is standard equipped with a vacuum lid, gasket seal & nozzle. NSF certified

WARRANTY

All models shown come with Invacus standard one year warranty against defects in materials and workmanship. For full warranty details, please refer to: Invacus.com





FEATURES

GN1/3 are manufactured with 17/18 gauge chrome nickel steel. In comparison, conventional containers are manufactured with 22/24 gauge steel. Oven safe.

LIDS

Developed from a high performance plastic (Tritan) Product Facts:

- •High impact resistance
- High weather resistance
- · High chemical resistance
- •Perfect abrasions-resistance and sliding condition
- •Minimum water absorption very high dimensions stability
- •Minimum specific weight
- •Excellent high impact resistance
- •High barrier-character
- •Lids short term resistant to temperatures up to 194°F (dishwater)

SEALS

The gaskets are made of food compatible silicone.

The valve is produced from latex.

All GreenVAC components are new developments for a use in high vacuum. The atmospheric pressure in such a vacuum has a value of 900 - 1700kg / cm2 depending on the size of GreenVAC container!

Used in connection with:

- •Henkelman Vacuum Machine w/External Adapter.
- •A retrofitted chamber machine.
- •Directly in the chamber of a standard vacuum machine, sizes are dependent on the chamber size.






www.invacus.com

Invacus LLC Sales and Technical Support 493 W Fullerton Ave Elmhurst IL, 60126 Ph: +1 331 979 2013 E: info@henkelmanusa.com Fax: +1 630 359 3875

Vacuum Packaging System Specs

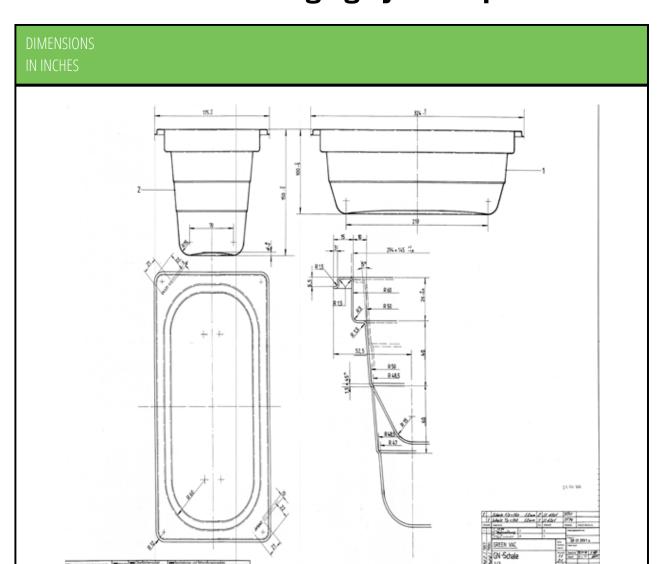

MODEL	DIMENSIONS (INCHES)			WEIGHT (LBS)	CAPACITY (US FLUID OZ)
GV150-GN1/3	L	W	Н	3.36 lbs	101.4 fl oz
	12.8"	6.92"	5.9"		





www.invacus.com

Invacus LLC Sales and Technical Support 493 W Fullerton Ave Elmhurst IL, 60126 Ph: +1 331 979 2013 E: info@henkelmanusa.com Fax: +1 630 359 3875